




BTS2 Stainless Temperature Sensors

Applications

- Gas Boilers/Boiler Flues
- Electric Water Heaters
- Heat Exchangers
- Air Conditioners
- Humidifiers

Features

- Fast response design ($T_c < 3s$)
- Direct sensing stainless sensor
- Suitable from $-40/+150^{\circ}C$
- Accuracy $\pm 3\%$, available down to $\pm 1\%$
- Excellent long-term stability

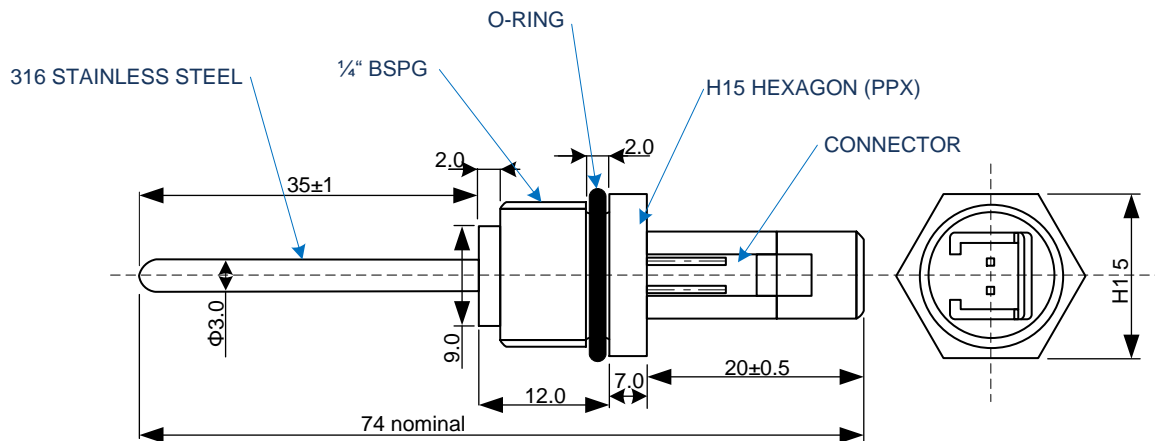

NTC Thermistor Series	ATCG, ET, GT-2, SP Series
Temperature Range	Suitable from $-40^{\circ}C/+150^{\circ}C$
Sensor Accuracy	R25 $\pm 3\%$ as standard, $\pm 1\%$ available
Sensor Material	316 Stainless Steel
Lead Wires	Integral as a special option
Connectors	Lumberg 2.5 MSF, Tyco Modu, etc

Options

Special versions available for volume applications