





STS4 High Temperature Film Thermistor Sensors

Applications

- Photocopiers
- Facsimile Machines
- Laser printers
- Hot Plates/Appliances

Features

- Fast response design ($T_c \leq 1s$)
- Accuracy $\pm 3\%$ or better
- Flexible Sensing Tip
- Excellent long-term stability
- Operating range up to $+230^\circ C$

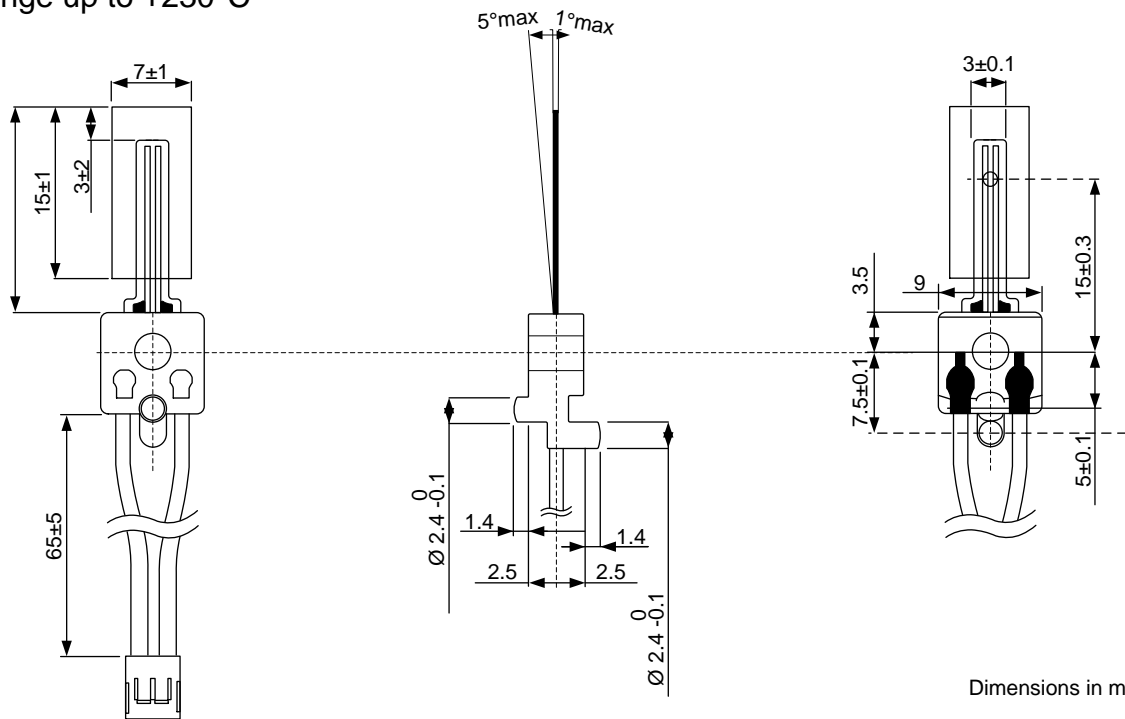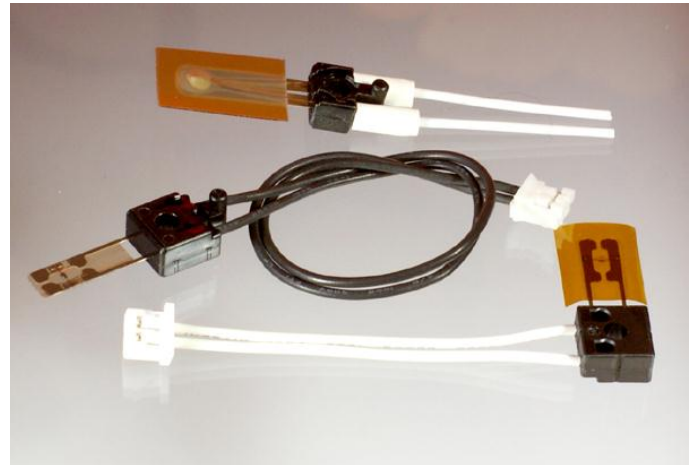

NTC Thermistor Series	FL, FT, GT
Temperature Range	-20°C/+230°C depending on NTC
Sensor Accuracy	R25 $\pm 3\%$ as standard, $\pm 1\%$ possible
Sensor Material	PTFE/FEP Film
Lead Wires	From 24~28AWG PVC, XLPE, FEP
Connectors	JST XHP-2, Molex Mini-fit Jr., etc.

Options

Special versions available for volume applications