





FRP4 Fast Response Thermistor Sensors

Applications

- Coffee machines
- Bearing housings
- Heated blocks/platens
- Gas boilers

Features

- Fast response design ($T_c \leq 3s$)
- Accuracy $\pm 3\%$
- Interchangeability between NTCs
- Excellent long-term stability
- Operating range up to $+180^\circ\text{C}$

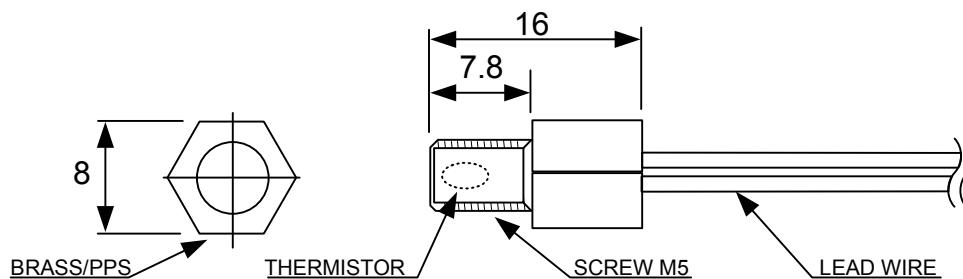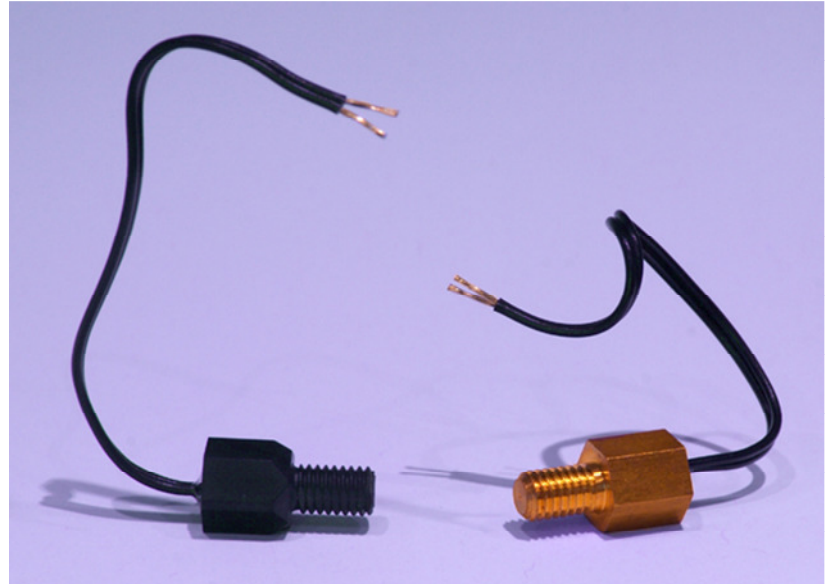

NTC Thermistor Series	ET, GT, ATCS
Temperature Range	$-50^\circ\text{C}/+180^\circ\text{C}$ depending on NTC
Sensor Accuracy	$R25 \pm 3\%$ as standard, $\pm 1\%$ possible
Sensor Material	Brass or PPS
Lead Wires	From 24~28AWG PVC, XLPE, FEP
Connectors	JST XHP-2, Molex Mini-fit Jr., etc.

Options

Special versions available