



SEMIFUSE[®] SFS1206F PTC Fuses

The SFS1206F series of PTC fuses offers a surface mount solution for motherboard, computer peripheral and various electronic applications. Our 1206 footprint can handle continuous currents up to 2A and voltages to 60V.

Characteristics

Agency Approvals; UL,C-UL and TÜV


Part Number	I _{hold} (A)	I _{trip} (A)	V _{max} (Vdc)	I _{max} (A)	P _d ^{max} (W)	Maximum Time to Trip @ 23°C		Resistance @ 23°C		Maximum Dimension (mm)	
						Current (A)	Time (Sec.)	R _{min} (Ω)	R _{1max} (Ω)	A	B
SFS1206F005TF	0.05	0.15	60	10	0.4	0.25	1.50	3.600	50.00	3.50	1.80
SFS1206F010TF	0.10	0.25	60	10	0.4	0.50	1.00	1.600	15.00	3.50	1.80
SFS1206F020TF	0.20	0.40	30	10	0.4	8.00	0.05	0.600	2.500	3.50	1.80
SFS1206F035TF	0.35	0.75	16	40	0.4	8.00	0.10	0.300	1.200	3.50	1.80
SFS1206F050TF	0.50	1.00	8	40	0.4	8.00	0.10	0.150	0.700	3.50	1.80
SFS1206F075TF	0.75	1.50	6	100	0.6	8.00	0.20	0.090	0.290	3.50	1.80
SFS1206F100TF	1.00	1.80	6	100	0.6	8.00	0.30	0.055	0.210	3.50	1.80
SFS1206F110TF	1.10	2.20	6	100	0.8	8.00	0.30	0.040	0.180	3.50	1.80
SFS1206F150TF	1.50	3.00	6	100	0.8	8.00	1.00	0.040	0.120	3.50	1.80
SFS1206F200TF	2.00	3.50	6	100	0.8	8.00	1.50	0.018	0.080	3.50	1.80

Definitions


- I_{hold} = Hold current, maximum current PTC will pass without tripping in 23°C still air.
- I_{trip} = Trip current - minimum current at which the PTC will trip in still air at 23°C.
- V_{max} = Maximum voltage PTC can withstand without damage at rated current (I_{max})
- I_{max} = Maximum fault current PTC can withstand without damage at rated voltage (V_{max})



Thermal De-Rating Curve

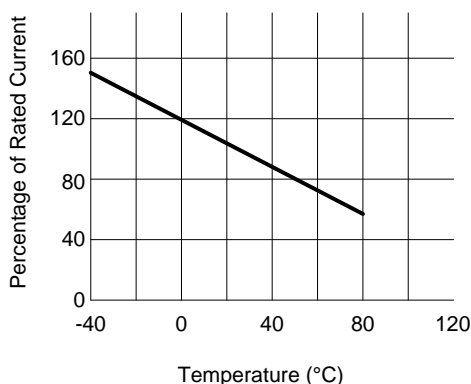

Configuration

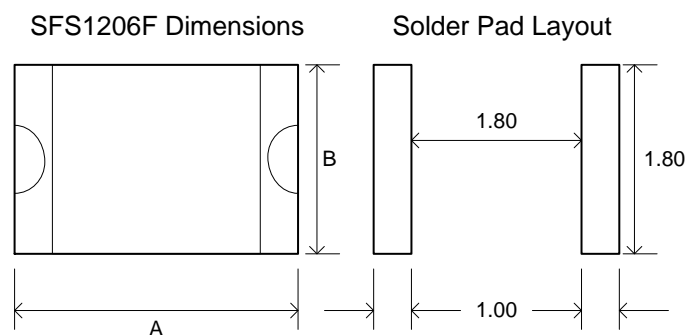

CAUTION: Operating beyond the specified maximum ratings may result in device damage and cause possible arcing and flame.