

SMD 0805-FC, Platinum Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +170 °C

The main application emphasis of the SMD 805-FC is hybrid circuits. Mass production, precision, long-term stability and low costs are also key themes of the design. The contact surfaces are on the side with the active measuring layer – no edge metallizing; i. e. the sensor is designed for face-down mounting, to take into account current trends in the adhesion instead of soldering electronics sector. Using conductive adhesives provides reliable and cost-effective connection technology, an alternative to the conventional application opportunities, such as reflow or wave soldering. An important advantage for users: the substrate material of the sensor (ceramic) shows a similar thermal expansion to that of the hybrid circuit.

The products are typically used in energy management, medical and industrial equipment. In principle, the products can also be used in automotive applications; in this case Heraeus will check upon the request of the customer, whether additional requirements can be met (e.g. IMDS, PPAP).

Nominal Resistance R_0	Tolerance	Order Number	Packaging
100 Ohm at 0 °C	F 0.3 (Class B) F 0.6 (Class 2B)	32 208 594 32 208 595	Blister reel "Face-down" 4000 pcs/ reel
1000 Ohm at 0 °C	F 0.3 (Class B) F 0.6 (Class 2B)	32 208 569 32 208 570	Blister reel "Face-down" 4000 pcs/ reel

Temperature and tolerance range

Tolerance Class F 0.3 (B): -50 °C to +170 °C

Tolerance Class F 0.6 (2B): -50 °C to +170 °C

By coordinating materials, design and connection technology applications are possible up to +250 °C

Temperature coefficient

TK = 3850 ppm/K

Response time

Water current ($v= 0.4\text{m/s}$): $t_{0.5} = 0.10\text{ s}$

$t_{0.9} = 0.25\text{ s}$

Air stream ($v= 2\text{m/s}$): $t_{0.5} = 2.50\text{ s}$


$t_{0.9} = 8.00\text{ s}$

Measuring current

100 Ω : 0.3 to 1.0 mA

1000 Ω : 0.1 to 0.3 mA

(self-heating has to be considered)

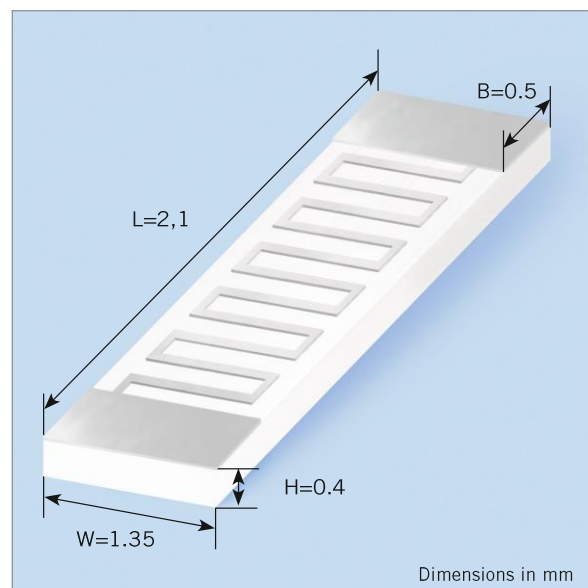

Long-term stability

R_0 -Drift 0.06 % after 1000 hours at 170 °C

Self-heating

0.8 K/mW at 0 °C

Contact

AgPt metallizing in thick-film technology



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Web: www.heraeus-nexensos.com

Name of document: 20002221231 Part 001 Version 01

Status: 11/2019

SMD 0805-FC, Platinum Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +170 °C

Connection technology

Reflow soldering or wave soldering, e. g. double wave soldering ≤ 8 s / 235 °C.

Also can be mounted using SMD insertion machines with Ag conductive adhesive. When mounting PCB circuits, the expansion relationship of the sensor and the substrate material must be taken into account.

Packaging

Alternative packaging forms on request.


Storage life

9 months (in original packaging)

Nitrogen atmosphere recommended

Note

Other tolerances, values of resistance are available on request.



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenhheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use. The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany
Web: www.heraeus-nexensos.com

Name of document: 20002221231 Part 001 Version 01

Status: 11/2019