

## SOT223, Housed Pt Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +150 °C

- Platinum sensor precision in SOT223 format
- Excellent long term stability
- High accuracy
- High vibration and shock resistance
- Optimized for soldering

The SOT223 is a Pt-RTD enclosed in an industry-standard SOT housing and is characterized by a linear resistance v. temperature response (as per DIN EN 60751), interchangeability, high long-term stability and accuracy. Designed for easy mounting in electronic assemblies and ideal for temperature compensation on PCBs, the SOT223 sensor is equipped with a cooling fin to enhance thermal contact with the PCB.

Nominal Resistance R <sub>0</sub> [Ω]	Tolerance Class	Order Number	Packaging
Pt1000	F 0.6 (Class 2B)	32209116	Blister reel

### Temperature Range of Tolerance Class

Tolerance Class F 0.6 (2B) -50 °C to +150 °C  
The specified tolerance classes refer to continuous operation.

### Temperature Coefficient

TCR = 3850 ppm/K

### Response Time

Water (v = 0.4 m/s):  
 t<sub>0.5</sub> = 0.45 s  
 t<sub>0.9</sub> = 1.2 s  
 Air (v = 2 m/s):  
 t<sub>0.5</sub> = 8 s  
 t<sub>0.9</sub> = 26 s

### Measuring Current

Pt1000 Ω: 0.1 to 0.3 mA  
(self-heating has to be considered)

### Long-Term Stability

The drift of the resistance value at 0 °C after a storage for 1000 hours in air at the declared upper temperature limit is not more than the tolerance value of the declared tolerance class according DIN EN 60751. Typical drift of R(0 °C) is 0.06 % after 1000 hours at +150 °C.

### Self-Heating

0.049 K/mW at 0 °C mounted on PCB  
 0.2 K/mW at 0 °C package only

### Specific Volume Resistance

100 °C = 14 X 10<sup>14</sup> Ωcm  
 150 °C = 0.3 X 10<sup>12</sup> Ωcm

### Physical Data For Housing

Material: duroplastic  
 Coefficient of thermal expansion: 12 x 10<sup>-6</sup> 1 /K (below T<sub>g</sub>)  
 Thermal Conductivity: 1.04 W/mK  
 Moisture absorption: Boiling water (48 hours) < 1.0 %

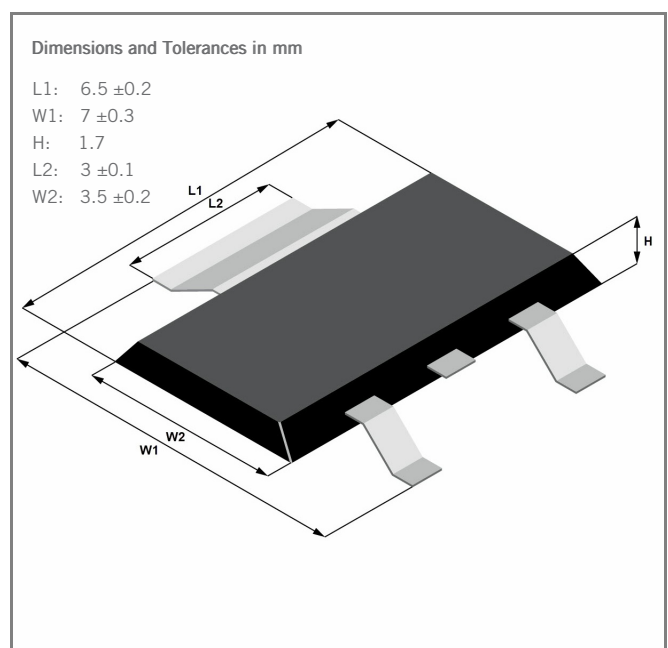


Image for illustration purposes only  
 The wide connection lug is used for heat transfer

## SOT223, Housed Pt Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +150 °C

---

### Flammability

UL94-V0

### Soldering Connection

Cu alloy with Sn coating

### Connection Technology

Soft Soldering

### Packaging

Blister reel

Alternative packaging forms on request

### Storage Life

9 months (in original packaging).

Nitrogen atmosphere recommended

### Note

Other tolerances and values of resistance are available on request

### California Proposition 65



## WARNING

WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer.

For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under [www.heraeus.com/gtc](http://www.heraeus.com/gtc) or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Heraeus Nexensos GmbH, Germany  
Web: [www.heraeus-nexensos.com](http://www.heraeus-nexensos.com)  
Contact: [nexensos.america@heraeus.com](mailto:nexensos.america@heraeus.com)

Document: 20002221298 | Part 001 | Version 01 | Status: 09/2021

Page 2 of 2