

SMD 1206 SC, Pt Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +200 °C, designed for sintering

- Excellent thermal coupling and quick response time via soldering connections
- Optimized long-term stability and high precision over entire operating life
- Electrically isolated bottom surface enables mounting on or near heat-generating components
- Maximum operating temperature exceeding 200 °C
- Contacts optimized for state-of-the-art bonding solutions

The SMD 1206 SC is designed for mounting to power electronic boards via silver sintering. The precision, low drift and long-term stability of a Pt RTD is delivered in an economical package. The isolation provided by the top-mounted terminations enables positioning of the chip anywhere on the board. Mounting in proximity to the heat source/die increases measurement accuracy and facilitates more compact designs.

Nominal Resistance R_0 [Ω]	Tolerance Class	Order Number	Packaging
Pt1000	F 0.6 (Class 2B)	5033344	Wafer Frame

Temperature Range of Tolerance Class

Tolerance Class F 0.6 (2B) -50 °C to +200 °C
The specified tolerance classes refer to continuous operation.

Temperature Coefficient

TCR = 3850 ppm/K

Measuring Current

Pt1000 Ω : 0.1 to 0.3 mA
(self-heating has to be considered)

Long-Term Stability

Max. R_0 - drift \leq 0.23 % after the following, independently performed standard tests:

- 1000 hours at +200 °C, \geq 0.1 mA
- 1000 hours at +85 °C, 85 % Hrel.
- 1000 cycles at -40 °C/ +150 °C

Self-Heating

< 0.4 K/mW (not assembled)

Insulation Resistance

> 1000 M Ω at 20 °C

Top Side Metallization

Bonding: AgPt surface in thick film technology for thick wire ultrasonic bonding process.

Recommendation: Heraeus Al H11 thick wires (\varnothing 300 μ m).
All tests were performed with recommended wire

Back Side Metallization

Sintering: AgPd surface in thick film technology for silver sintering process.

Recommendation: Heraeus sinter paste (ASP 338 and 043 series)

All tests were performed with recommended paste

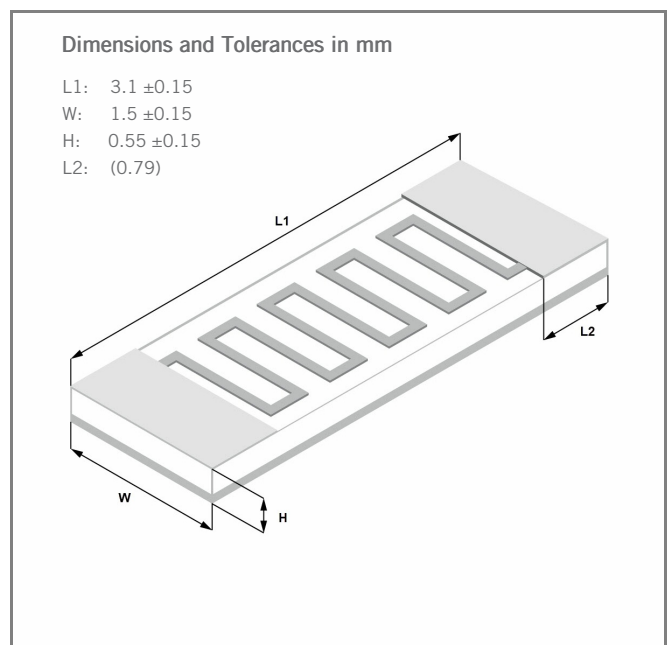


Image for illustration purposes only
Color, shape and forming of metallization may vary

SMD 1206 SC, Pt Temperature Sensor according to DIN EN 60751

Temperature range -50 °C to +200 °C, designed for sintering

Connection Technology

Suitable for sintering on backside, for optimized heat transfer and on top side for ultrasonic wire bonding

Shear Test Backside

Sintering

> 10 N/mm² (single value)

> 20 N/mm² (mean value)

Pull Test Topside

Bonding

> 210 cN (equals 75 % wire load limit of Al H11 thick wires $\varnothing = 300 \mu\text{m}$)

Packaging

Wafer Frame

Substrate on wafer frame in (aluminized vacuum) plastic bag

Storage Life

In unopened original packing (minimum half a year)

Note

Other tolerances and values of resistance are available on request.

California Proposition 65



WARNING

WARNING: This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer.

For more information go to www.p65warnings.ca.gov



The information provided in this data sheet describes certain technical characteristics of the product, but shall not be qualified or construed as quality guarantee (Beschaffenheitsgarantie) in the meaning of sections 443 and 444 German Civil Code. The information provided in this data sheet regarding measurement values (including, but not limited to, response time, long-term stability, vibration and shock resistance, insulation resistance and self-heating) are average values that have been obtained under laboratory conditions in tests of large numbers of the product. Product results or measurements achieved by customer or any other person in any production, test, or other environment may vary depending on the specific conditions of use.

The customer is solely responsible to determine whether the product is suited for the customer's intended use; in this respect Heraeus cannot assume any liability. The sale of any products by Heraeus is exclusively subject to the General Terms of Sale and Delivery of Heraeus in their current version at the time of purchase, which is available under www.heraeus.com/gtc or may be furnished upon request. This data sheet is subject to changes without prior notice.

Heraeus Nexensos GmbH, Reinhard-Heraeus-Ring 23, 63801 Kleinostheim, Germany

Heraeus Nexensos GmbH, Germany
Web: www.heraeus-nexensos.com
Contact: nexensos.america@heraeus.com

Document: 20002297107 | Part 001 | Version 04 | Status: 09/2021

Page 2 of 2