


SINGLE OPERATION THERMOSTATS



METRIC DIMENSIONS ARE IN MM (SHOWN IN GREEN)

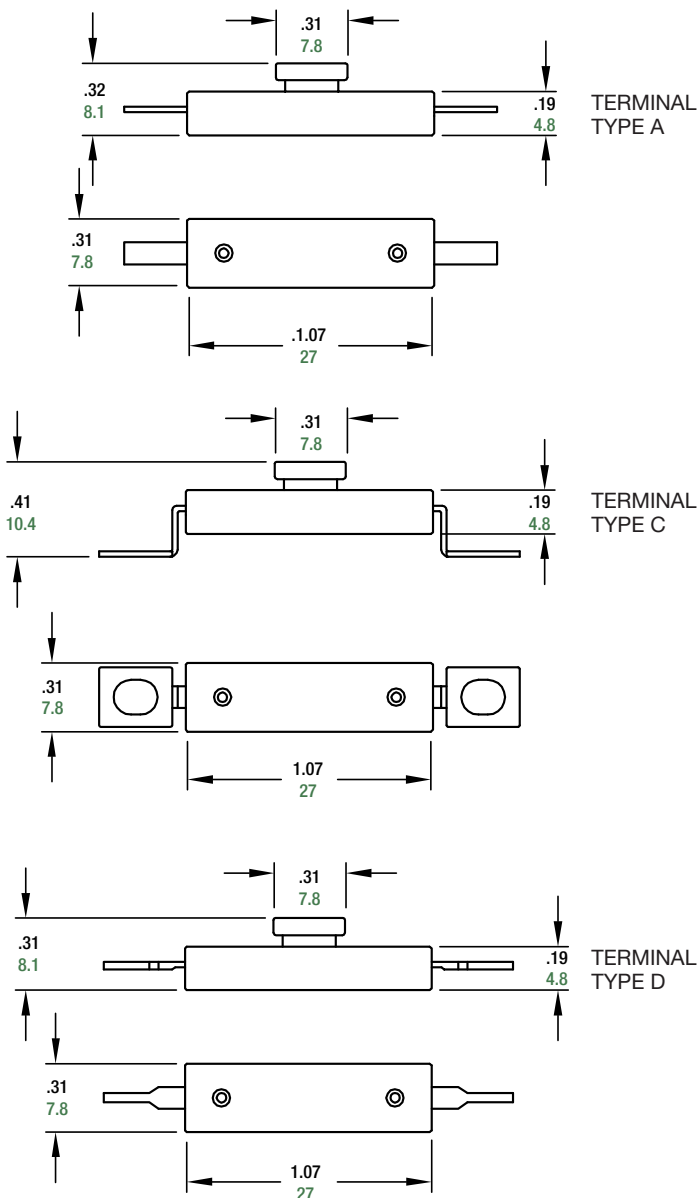

Model H-8

These Snap Action Thermal Controls operate as a high limit, single operation (non-resettable) type control. The ceramic case isolates them from the electrical circuit and allows them to operate at temperatures up to 280°C. As single operation thermostats they perform like a thermal fuse with the reliability of a 100% tested bimetallic thermal control.

FEATURES

- Snap action devices; quick make/quick break switching action.
- Single Operation type devices. Reset temperature is less than -35°C. This prevents the thermostat from resetting under normal operating conditions.
- Unique positioning of the bi-metallic element allows for excellent heat transfer for improved reaction time.
- Available with exposed bi-metallic elements for even faster thermal response.
- Ceramic case isolates devices from the electrical circuit and is suitable for use in high temperature applications.
- Can be mounted directly on a heated surface.
- Preset calibration temperature, not adjustable in the field.
- Opposite end termination allows for flexibility of installation.
- Factory installed lead wires or terminals available – Consult Factory.

CONTACT RATINGS

- 10 amps / 250V AC (resistive)
- 15 amps / 125V AC (resistive)
- CUL, TUV

CALIBRATION TEMPERATURE RANGE

- Available with nominal calibration temperatures from 250°C to 280°C.

APPLICATIONS

Almost anywhere ultimate safety is required. Included are curling irons and many other small appliances.

We come through when the heat is on®



Pepi®

Portage Electric Products, Inc.

7700 Freedom Ave. NW, P.O. Box 2170, North Canton, Ohio 44720, U.S.A.

Phone: (330) 499-2727 • 1-888-G04-PEPI • FAX (330) 499-1853 • e-mail: salesinfo@pepiusa.com • www.pepiusa.com

Copyright 2011, Portage Electric Products, Incorporated, all right reserved